

**UK
CA**

Available through:



Comax **Klik 31**

Comax **Falc**

Comax **BoCo 330**



comaxroofs.co.uk

Comax **Klik 31**

- ✓ **Modern, easy-fit** standing seam system
- ✓ **75-year warranty** (applies to aluminium Klik)
- ✓ Improved **“Klik” lock** makes fitting even easier
- ✓ Microprofiling variant for **higher toughness**
- ✓ More than **600 color shades**




Material	FeZn	Al
Material thickness	0,5 - 0,55 mm	0,7 mm
Effective width of profile	475 mm	455 mm
Height of profile	31 mm	31 mm
Minimum length	850 mm	850 mm
Maximum length	8 000 mm	8 000 mm
Min. pitch without connection	9°	9°
Min. pitch with connection	15°	15°

The diagram shows a cross-section of the Comax Klik 31 standing seam roof profile. It illustrates the interlocking mechanism between two panels. The top flange has a height of 31 mm. The main body of the panel has a height of 33 mm. The distance between the centers of the top flanges is 475 mm for FeZn and 455 mm for Al. The distance between the centers of the bottom flanges is 9 mm. The diagram also shows the profile being installed on a roof structure.

Profilation variants:



Press



Microprofiling



Soft



Comax Falc




- ✓ **Prepainted coils** for profiling of standing seam roofing system with **75-year warranty** (applies to aluminium)
- ✓ Developed for **easy forming and fitting**, suitable for very **detailed roofs and long spans**
- ✓ Supplied in **sheet form** cut to length (COMAX Falc 25), or **coils** to be formed on site with profiling machines (COMAX Falc)




Material	FeZn	Al
Material thickness	0,50 - 0,55 mm	0,70 mm
Input coil width	620 mm	600 mm
Parameters of the profiled standing seam roofing COMAX FALC 25:		
Height of profile	25 mm	25 mm
Effective width of profile	540 mm	540 mm / 520 mm
Minimum length	600 mm	600 mm
Maximum length	* 10 000 mm	* 10 000 mm
Minimum pitch	4°	4°

* Possibility of profiling up to a length of 15 m;
in case of additional measures - according to the installation instructions

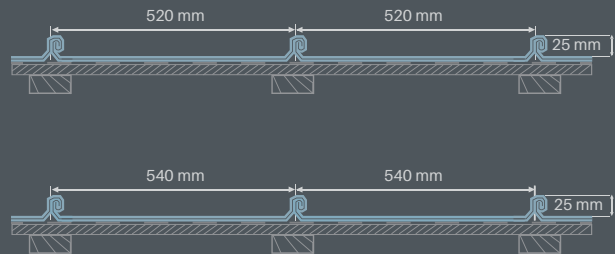


Comax BoCo 330

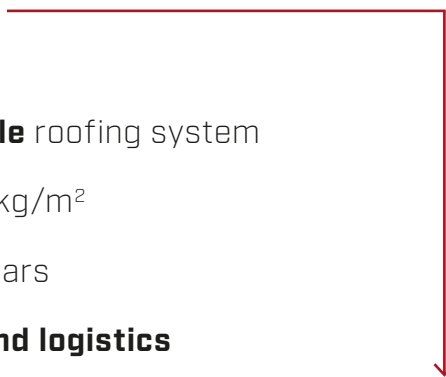

- ✓ Historically proven **small-format shingle** roofing system
- ✓ **Lightweight aluminium** roof cover – 2 kg/m²
- ✓ **Guarantee of functionality** up to 64 years
- ✓ **Advantageous** in terms of **assembly and logistics**

Technical data:

	COMAX BoCo 330
Material	Al
Material thickness	0,7 mm
Effective width of shingle	330 x 330 mm
Consumption in m ²	9,18 pcs
Minimum pitch	22°
Packing (box)	22 pcs = 2,396 m ²

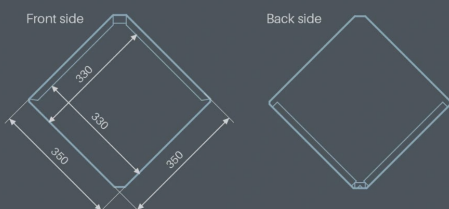



Available through:



Speak to a member of the **United Roofing Products** team today to find out more...

01884 839 302

sales@unitedroofingproducts.com

Unit 4 Lucas Way, Hitchcocks Business Park, Uffculme, Cullompton, Devon, EX15 3FA