



Product Datasheet

www.unitedroofingproducts.com

URP 1000/32 is a versatile profile that can be used in a wide variety of applications. It makes a robust roofing sheet and can be produced in forward or reverse profile to create attractive vertical elevations. It can also be used as a lining sheet in twin skin insulated systems and as a roof liner.


Since its launch it has become our most popular profile, particularly in the industrial sector and is available on a fast turnaround in a wide range of colours and finishes. It is also the profile that we have utilised to create our Highlight ventilated wall cladding for agricultural buildings.

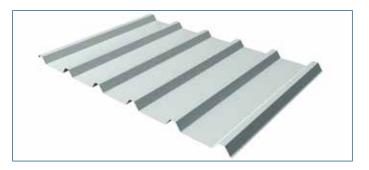



URP 1000/32 Steel Roof & Wall Profile • Thickness 0.5mm • Lengths up to 10m • Weight 4.57kg/m²

| Wind Suction (kN/m ²) | Deflection Limit L/90 | | | | | | | | |
|-----------------------------------|------------------------|-------------|-------------|-------------|-------------|-------------|-------------|--|--|
| Span: | 1.20 | 1.30 | 1.40 | 1.50 | 1.60 | 1.70 | 1.80 | | |
| Single | 2.38 | 2.03 | 1.75 | 1.52 | 1.34 | 1.19 | 1.06 | | |
| Double | 1.42 | 1.26 | 1.13 | 1.01 | 0.92 | 0.83 | 0.76 | | |
| Multi | 1.69 | 1.50 | 1.35 | 1.21 | 1.10 | 1.00 | 0.92 | | |
| Imposed Load (kN/m²) | Deflection Limit L/200 | | | | | | | | |
| Span: | 1.20 | 1.30 | 1.40 | 1.50 | 1.60 | 1.70 | 1.80 | | |
| Single | 2.32 | 1.98 | 1.71 | 1.49 | 1.31 | 1.13 | 0.95 | | |
| Double | 1.44 | 1.28 | 1.14 | 1.03 | 0.93 | 0.85 | 0.77 | | |
| Multi | 1.71 | 1.52 | 1.36 | 1.23 | 1.11 | 1.01 | 0.93 | | |
| Drifting Snow Load (kN/m²) | | | | | | | | | |
| Span: | 1.20 | 1.30 | 1.40 | 1.50 | 1.60 | 1.70 | 1.80 | | |
| Single | 3.48 | 2.97 | 2.56 | 2.23 | 1.96 | 1.19 | 1.55 | | |
| Double | 2.16 | 1.92 | 1.71 | 1.54 | 1.40 | 0.83 | 1.16 | | |
| Multi | 2.57 | 2.28 | 2.05 | 1.84 | 1.67 | 1.52 | 1.39 | | |



URP 1000/32 Steel Roof & Wall Profile • Thickness 0.5mm • Lengths up to 10m • Weight 4.57kg/m²

| Positive Load (kN/m²) | | | | | | | |
|-----------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Span: | 1.20 | 1.30 | 1.40 | 1.50 | 1.60 | 1.70 | 1.80 |
| Single | 2.38 | 2.03 | 1.75 | 1.52 | 1.34 | 1.19 | 1.06 |
| Double | 1.42 | 1.26 | 1.13 | 1.01 | 0.92 | 0.83 | 0.76 |
| Multi | 1.69 | 1.50 | 1.35 | 1.21 | 1.10 | 1.00 | 0.92 |
| Negative Load (kN/m²) | | | | | | | |
| Span: | 1.20 | 1.30 | 1.40 | 1.50 | 1.60 | 1.70 | 1.80 |
| Single | 2.32 | 1.98 | 1.71 | 1.49 | 1.31 | 1.13 | 0.95 |
| Double | 1.44 | 1.28 | 1.14 | 1.03 | 0.93 | 0.85 | 0.77 |
| Multi | 1.71 | 1.52 | 1.36 | 1.23 | 1.11 | 1.01 | 0.93 |

Tel: 01884 839 302



EVERYTHING UNDER ONE ROOF











The metal building envelope solution provider for the industrial and agricultural markets

We manufacture, stock or source all products for the agricultural market, specialist contractors, frame builders and end users alike. From the steel frame out we have it all under one roof. Insulated composite roof and wall panels Single skin profiles • Twin skin systems Purlins and rails • Condensation control Gutters and flashings • Rooflights Drainage products • Fixings and sealants Aluminium products

Call us on 01884 839302



sales@unitedroofingproducts.com www.unitedroofingproducts.com United Roofing Products,

Longbridge Meadow Ind Est, Cullompton, Devon EX15 1BT